





Up to
60 000 BTU/hr

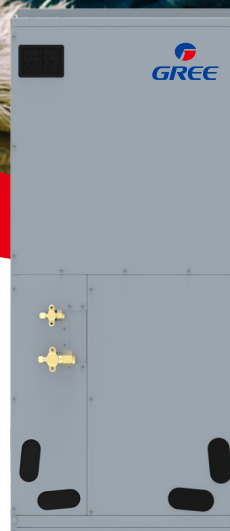

CENTRALLY DUCTED SYSTEM
WITH SIDE DISCHARGE CONDENSER

FLEXX Series



Performance in
heating down to
-30°C



Eligible for
local rebates **



*10-year standard warranty, plus bonus 2-year extended warranty upon product registration and/or proof of installation.

**Please check your local and federal rebate programs.

 1108 Rue Berlier, Laval, QC H7L 3R9



1 (877) 651-8495



info@airtekquebec.com



www.airtekshop.com

- Hyper-Heat Technology
- Compact Side-Discharge Condenser
- Quiet Operation
- Retrofit Capability
- 24V Communication Protocol
- Durable Built Steel Cabinet
- Two stage variable speed compressor
- Eco-friendly R410A refrigerant



OUTDOOR UNIT SPECIFICATIONS			GUD36W/A-D(U)	GUD36W/A-D(U)	GUD60W/A-D(U)	GUD60W/A-D(U)
Capacity	Cooling	BTU/hr	24000(12000-24000)	36000(18000-37000)	48000(34000-48000)	54000(35000-54000)
	Heating	BTU/hr	24000(12000-30000)	36000(18000-38000)	48000(34000-52000)	54000(35000-60000)
Power Supply		V/Hz/Ph	208-2300 //60/1			
Ambient Temperature	Cooling	F° (C°)	5 to 129 (-15 to 54)			
	Heating	F° (C°)	-22 to 75 (-30 to 24)			
Sound Pressure Level		dB(A)	52 (45-56)	52 (45-56)	58 (48-61)	58 (48-61)
Maximum Overcurrent Protection (MOP)		A	35	35	45	45
Refrigerant Type / Charge		oz (kg)	R410A/148.8 (4.2)	R410A/148.8 (4.2)	R410A/220.8(6.2)	R410A/220.8(6.2)
Dimensions	Width	in (mm)	32-1/4 (820)	32-1/4 (820)	39-3/8 (1000)	39-3/8 (1000)
	Height	in (mm)	37 (940)	37 (940)	53-5/8 (1363)	53-5/8 (1363)
	Depth	in (mm)	18-1/8 (460)	18-1/8 (460)	14-1/2 (370)	14-1/2 (370)
Weight	Net	lb (kg)	217.2 (98.5)	217.2 (98.5)	308.7 (140)	308.7 (140)
AIR HANDLER UNIT			GUD24AH2/A-D(U)	GUD36AH2/A-D(U)	GUD48AH2/A-D(U)	GUD60AH2/A-D(U)
SEER2		BTU/W*hr	17.0	16.0	17.0	15.3
EER2		BTU/W*hr	12.0	10.0	11.0	10.0
HSPF2		BTU/W*hr	9.0	9.0	9.0	9.0
COP at -15°C (5°F)		W/W	1.8	1.8	1.8	1.8
AHRI Code		-	206249116	206249117	206249119	206249118
Energy Star®		-	YES	NO	NO	NO
Moisture Removal Capacity		L/hr (pt/hr)	2.85(6.03)	4.58(9.68)	4.70(9.94)	5.74(12.13)
Airflow Volume		m³ /hr (CFM)	1631(960)	1700(1000)	2345(1380)	2720(1600)
Sound Pressure Level		dB(A)	45	47	50	51
Maximum Overcurrent Protection (MOP)		A	15	15	15	15
Dimensions	Width	in (mm)	21-1/4(540)	21-1/4(540)	24-3/4(630)	24-3/4(630)
	Height	in (mm)	48-1/4(1224)	48-1/4(1224)	57(1448)	57(1448)
	Depth	in (mm)	21-1/4(540)	21-1/4(540)	21-1/4(540)	21-1/4(540)
Weight	Net	lb (kg)	156.5(71)	156.5(71)	202.8(92)	202.8(92)
CASED COIL UNIT			GCAT24F/NaA	GCAT36F/NaA	GCAT48H/NaA	GCAT60H/NaA
SEER2		BTU/W*hr	15.2	15.2	15.2	15.2
EER2		BTU/W*hr	11.0	9.5	10.0	9.5
HSPF2		BTU/W*hr	8.5	8.5	8.5	8.5
COP at -15°C (5°F)		W/W	1.8	1.8	1.8	1.80
AHRI Code		-	206249116	206249117	206249118	206249119
Moisture Removal Capacity		L/hr (pt/hr)	2.85(6.03)	4.58(9.68)	4.70 (9.94)	5.74 (12.13)
Dimensions	Width	in (mm)	17-1/2(445)	17-1/2(445)	24-1/2(622)	24-1/2(622)
	Height	in (mm)	23(584)	23(584)	28-1/2(724)	28-1/2(724)
	Depth	in (mm)	21-1/4(540)	21-1/4(540)	21-1/4(540)	21-1/4(540)
Weight	Net	lb (kg)	64(29)	64(29)	94.8(43)	94.8(43)

*** Note: Optional auxiliary heater. Consult your certified technician for the MCA and MOP values required for the use of an electric auxiliary heater.**

All rights reserved.

Airtek reserves the right to change any features and specifications without prior notice or obligation. GREE products are continuously enhanced.

All trademarks referenced in this document belong to their respective owners.